

Product Specification 【产品规格书】	Document No.	PS-2043-03
Product Name 【产品名称】： 2.00mm Pitch 2043 Series Connector	Date Issued	2024/09/09
	Date Revised	/
	Version	A0

This specification is only referred to the 2043 series connector

索引 【INDEX】



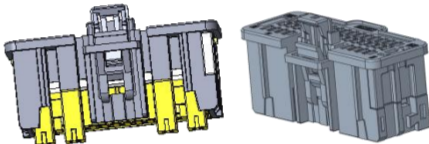
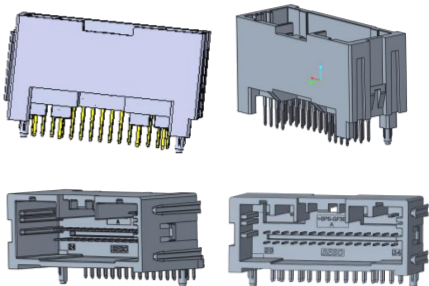
- 适用范围 【Scope】
- 产品型号描述 【Product Description】
- 材质与表面处理 【Material and Surface treatment】
- 额定等级 【Ratings and applicable wires】
- 测试方法及要求 【Test Methods and Requirements】
 - 外观检查 【Examination of product】
 - 电气性能 【Electrical Performance.】
 - 机械性能 【Mechanical Performance】
 - 环境性能及特殊要求 【Environmental Performance and Special Requirments】
- 测试组 【Test Group】

Product Specification 【产品规格书】	Document No.	PS-2043-03
Product Name 【产品名称】： 2.00mm Pitch 2043 Series Connector	Date Issued	2024/09/09
	Date Revised	/
	Version	A0

【1.适用范围 Scope】

此规格包括 2.00mm Pitch 2043Series 连接器规格说明。
This Specification includes the 2.00mm Pitch 2043Series Connector Specification.

【2.产品型号描述 Product Description】

产品名称 Part Name	产品料号 Part No.	产品图示 Picture
端子/Terminal	2043TXF-HY2B	
端子/Terminal	2043TX-HY2B-01	
胶壳/Housing	2043AM-T34A4X-N0XX 2043AM-T38A8X-N0XX	
针座/Wafer	2043WV-T34A4X-SSSW1XT 2043WV-T34A4X1-SSSW1XT 2043WR-T34A4X-SSSW1XT 2043WR-T38A8X-SSSW1XT 2043WV-T38A8X-SSSW1XT	

Product Specification 【产品规格书】	Document No.	PS-2043-03
Product Name 【产品名称】： 2.00mm Pitch 2043 Series Connector	Date Issued	2024/09/09
	Date Revised	/
	Version	A0

【3.材质与表面处理 Material and surface treatment】

规格内容 Specification		材 质 Materials	颜色/表面处理 Color/Surface treatment
端子/Terminal		铜合金/Copper alloy	Top plating: Sn (1~3μm) overall
胶壳/Housing		PA66-GF30 (UL 94V-0)	黑色 Black/灰色 Gray
二次锁/TPA		PA66-GF30 (UL 94V-0)	本色 Natural
CPA		PA66-GF30 (UL 94V-0)	本色 Natural
针座 Header	Housing	SPS-GF30 (UL 94V-0)	黑色 Black/灰色 Gray
	Pin	铜合金/Copper alloy	Underplated: Ni 1.25~2.5μm)overall; Top plating: Sn (2.5~4.5μm) overall

(上述参数请以工程图为准/Please Refer to the Project drawing for the above Specification)

【4. 额定等级 Ratings and applicable wires】

项 目 Item	规 格 Specification	
额定电压 Rated Voltage	14V	[AC/DC]
额定电流 Rated Current	16A 1.5mm ² (Max)	
额定电流 Rated Current	3A 0.35mm ² (Max)	
使用温度范围 Ambient Temperature Range	-40℃~+125℃	

Product Specification 【产品规格书】	Document No.	PS-2043-03
Product Name 【产品名称】： 2.00mm Pitch 2043 Series Connector	Date Issued	2024/09/09
	Date Revised	/
	Version	A0

【5.测试方法及要求 Test Methods and Requirements】

5-1. 外观检查 Examination of product.

测试内容 Item		规格要求 Specification requirements	参考标准 Reference standard
5-1-1	产品外观检查 Visual Inspection	借助 10 倍放大镜对每一个试验样品进行检查，详细记录所有制造或材料的瑕疵，如：裂缝、变色、毛刺等。 Inspect each sample with a 10x magnification, recording all defects in all process or material defects such as cracks, discoloration, flash, etc.	USCAR-2 Rev.8 5.1.8

5-2. 电气性能 Electrical Performance.

测试内容 Item		规格要求 Specification requirements	参考标准 Reference standard
5-2-1	电路连贯性监控 Circuit Continuity Monitoring	电流的连续性监控间断不能超过 1us 不允许任何端子电阻超过 7 欧的时间大于 1us 的情况发生 There must be no loss of electrical continuity for more than 1 microsecond There must be no instance in which the resistance of any terminal pair exceeds 7.0 Ω for more than 1 microsecond	USCAR-2 Rev.8 5.1.9
5-2-2	干电路电阻 Dry Circuit Resistance	信号 Pin ≤ 25mΩ 电源 Pin ≤ 15mΩ Signal Contact ≤ 25mΩ Power Contact ≤ 15mΩ	USCAR-2 Rev.8 5.3.1
5-2-3	电压降 Voltage Drop	在环境后 ≤ 50mV After the environment ≤ 50mV	USCAR-2 Rev.8 5.3.2
5-2-4	最大试验电流能力 Maximum test current capacity	在无风的封闭场所内搭建一个电路 温度：23±5℃(室温) 时间：等待 15 分钟（电流在输出时，电路的温度达到稳定） 温升：55℃ Create a circuit in a draft free environment Temperature :23±5℃(room temperature) Time: Wait at least 15 minutes for the circuit temperature to reach Steady State Temperature Rise: 55℃	USCAR-2 Rev.8 5.3.3

Product Specification 【产品规格书】	Document No.	PS-2043-03
Product Name 【产品名称】： 2.00mm Pitch 2043 Series Connector	Date Issued	2024/09/09
	Date Revised	/
	Version	A0

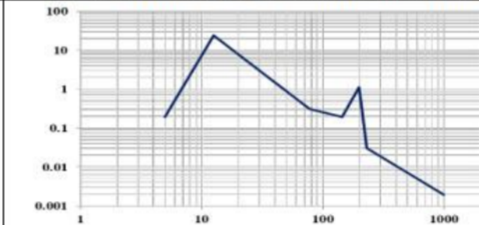
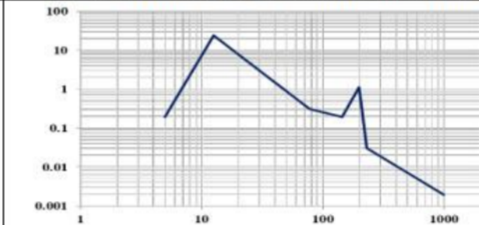
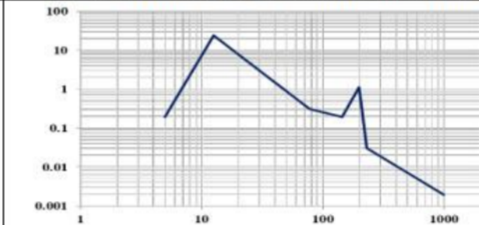
测试内容 Item		规格要求 Specification requirements	参考标准 Reference standard
5-2-5	电流循环 Current Cycling	1.测试电流为最大试验电流 90%（测试项 5-2-4） 2.通电 45 分钟，断电 15 分钟，完成 1008 个循环 3.任何端子温升不超过 55℃ 4.干电路电阻 信号 Pin≤25mΩ 电源 Pin≤15mΩ 1.The test current is 90% of the maximum test current (Item:5-2-4) 2.45 minutes of power on ,15 minutes of power off ,and 1008 cycles are completed. 3.The temperature rise must not exceed 55℃ at any time during the test for any terminal 4.Dry circuit resistance is less than or equal Signal Contact≤25mΩ, Power Contact≤15mΩ	USCAR-2 Rev.8 5.3.4
5-2-6	绝缘电阻 Insulation Resistance	将试验样品的所有接端交错连接成两组，再施加 500 VDC 电压测量绝缘电阻。绝缘电阻>100 MΩ Apply 500 VDC voltage (desiccation bound) between all contacts connected together and a metal foil surrounding the housing. In addition, apply the voltage a different test sample to every two adjacent contacts. Insulation resistance >100 MΩ	USCAR-2 Rev.8 5.5.1

5-3. 机械的性能 Mechanical Performance.

测试内容 Item		规格要求 Specification requirements	参考标准 Reference standard
5-3-1	连接器/端子循环 Connector and/or Terminal Cycling	完成每一对连接器或端子 10 次插拔 Completely mate and un-mate each connector or terminal pair 10 times	USCAR-2 Rev.8 5.1.7
5-3-2	端子到端子啮合/分离力 Terminal to Terminal Engage/Disengage Force	以不超过 50mm/min 的均匀速度插入-分离对配端子 注意接触面的任何磨损，不应暴露基材 Engage and disengage the mating terminals at a uniform rate not to exceed 50 mm/min No base material should be exposed	USCAR-2 Rev.8 5.2.1
5-3-3	连接器至连接器的配合/分离力（无机械辅助） Connector-Connector Mating/Unmating/ Retention Forces (non-assist)	组装所有适配组件，以 50mm/min 的均匀速度配合连接器，插入力≤75 N 以不超过 50mm/min 的均匀速度拔出配合的主锁被完全分离/禁用的连接器，拔出力≤75N Completely assemble all connector halves using all applicable components, mating the connectors at a uniform rate 50mm/min, Mating Force≤75N Disengage the mating connectors that primary lock	USCAR-2 Rev.8 5.4.2 LV214-1 TG7 (Table 5)

Product Specification 【产品规格书】		Document No.	PS-2043-03																																			
Product Name 【产品名称】： 2.00mm Pitch 2043 Series Connector		Date Issued	2024/09/09																																			
		Date Revised	/																																			
		Version	A0																																			
		completely disengaged/disabled at a uniform rate not to exceed 50mm/min. Unmating Force≤75N 注：组装所有适配组件，以 50mm/min 的均匀速度卡扣保持力（不含端子）不依 5.4.2.4 要求的>110N 标准。该项标准依 LV214-1 TG7 执行（下表）。 Note: All adaptive components shall be assembled, and the retaining force of the buckle (excluding terminals) shall not comply with 5.4.2.4 at a uniform speed of 50mm/min. 110 n. This standard is implemented according to LV214-1 TG7 (Table below).																																				
		<table><tr><th colspan="4">Table 5 – Positive-locking contact housing holding forces</th></tr><tr><th colspan="4">Positive-locking contact housing holding forces</th></tr><tr><th rowspan="2">Contact size in mm</th><th colspan="3">Number of pins</th></tr><tr><th>1 to 2 pins</th><th>3 to 6 pins</th><th>> 6 pins</th></tr><tr><td>0.5</td><td>> 40 N</td><td>> 50 N</td><td>> 60 N</td></tr><tr><td>0.63 to 1.2</td><td>> 60 N</td><td>> 80 N</td><td>> 100 N</td></tr><tr><td>> 1.2 to 2.8</td><td>> 80 N</td><td>> 100 N</td><td>> 100 N</td></tr><tr><td>> 2.8 to 6.3</td><td>> 100 N</td><td>> 100 N</td><td>> 100 N</td></tr><tr><td>> 6.3</td><td>> 150 N</td><td>> 150 N</td><td>> 150 N</td></tr></table>		Table 5 – Positive-locking contact housing holding forces				Positive-locking contact housing holding forces				Contact size in mm	Number of pins			1 to 2 pins	3 to 6 pins	> 6 pins	0.5	> 40 N	> 50 N	> 60 N	0.63 to 1.2	> 60 N	> 80 N	> 100 N	> 1.2 to 2.8	> 80 N	> 100 N	> 100 N	> 2.8 to 6.3	> 100 N	> 100 N	> 100 N	> 6.3	> 150 N	> 150 N	> 150 N
Table 5 – Positive-locking contact housing holding forces																																						
Positive-locking contact housing holding forces																																						
Contact size in mm	Number of pins																																					
	1 to 2 pins	3 to 6 pins	> 6 pins																																			
0.5	> 40 N	> 50 N	> 60 N																																			
0.63 to 1.2	> 60 N	> 80 N	> 100 N																																			
> 1.2 to 2.8	> 80 N	> 100 N	> 100 N																																			
> 2.8 to 6.3	> 100 N	> 100 N	> 100 N																																			
> 6.3	> 150 N	> 150 N	> 150 N																																			
5-3-4	端子至连接器插入/保持力 Terminal-Connector Insertion/Retention Force	端子以不超过 50mm/min 的均匀速度插入连接器 端子插入力≤15N 端子以不超过 50mm/min 的均匀速度拉出连接器 端子保持力(一次锁+二次锁)≥40N The terminal straight into the connector at a uniform rate not to exceed 50 mm/min Insertion Force≤15N Pull the terminal straight back from the connector at a uniform rate not to exceed 50mm/min, until pullout occurs. Retention Force (Primary+Secondary Lock)≥40N																																				
5-3-5	混合组件的啮合分离力 Miscellaneous Component Engage/Disengage Force	15N≤啮合力≤60N 18≤分离力≤60 15N≤Engagement Force≤60N 18N≤Removal Force≤60N																																				

Product Specification 【产品规格书】	Document No.	PS-2043-03
Product Name 【产品名称】： 2.00mm Pitch 2043 Series Connector	Date Issued	2024/09/09
	Date Revised	/
	Version	A0

测试内容 Item		规格要求 Specification requirements	参考标准 Reference standard				
5-3-6	震动/机械冲击 Vibration/Mechanical Shock	1.冲击：1.加速度 35g、脉宽 5~10ms、半正弦，每轴 10/次、6 个轴向 2.振动：三个相互垂直的轴中各进行 8 小时振动测试，使用 5-1000HZ 1.81grms 没有任何端子对的电阻在 1 微秒内超过 7.0Ω的情况发生 Shock： 1. Acceleration 35 g, Duration 5~10 ms,Half Sine Wave 2.Each axis 10/times ,6 axes. Vibration :8 hours of vibration test in each of the three vertical axes, using 5-1000 HZ 1.81grms Does not occur when the resistance of any terminal pair exceeds 7.0Ω within 1 microsecond. <table><tr><th>Level</th><th>Random (PSD in (m/s²)²/Hz versus Frequency in Hz)</th></tr><tr><td>V1</td><td></td></tr></table>	Level	Random (PSD in (m/s ²) ² /Hz versus Frequency in Hz)	V1		USCAR-2 Rev.8 5.4.6
Level	Random (PSD in (m/s ²) ² /Hz versus Frequency in Hz)						
V1							
5-3-7	极性特征有效性 Polarization Feature Effectiveness	以错误的方向将公连接器插入母连接器,公母端子间不通电 Insert the male connector into the female connector in the wrong direction, and the male and female terminals are not electrical contact	USCAR-2 Rev.8 5.4.4				
5-3-8	端板 Pin 针保持力 Header Pin Retention	保持力 ≥15N Retention force ≥15 N	USCAR-2 Rev.8 5.7.1				

Product Specification 【产品规格书】	Document No.	PS-2043-03
Product Name 【产品名称】： 2.00mm Pitch 2043 Series Connector	Date Issued	2024/09/09
	Date Revised	/
	Version	A0

5-4. 环境性能及特殊要求 Environmental Performance and Special Requirments.

测试内容 Item		规格要求 Specification requirements	参考标准 Reference standard
5-4-1	热冲击 Thermal Shock	低温-40℃，高温+125℃ 低温保持 30 分钟, 高温保持 30 分钟, 高低温转换小于 30 秒, 100 次循环, 不能有任何端子电阻超过 7 欧的时间大于 1us 的情况发生 干电路电阻 信号 Pin≤25mΩ 电源 Pin≤15mΩ; 电压降≤50mV Min.temperature:-40℃,Max.temperature:+125℃ Cold soak for 30 min,Heat soak for 30 min,Transfer time<30s, Cycles 100 times,There must be no instance in which the resistance of any terminal pair exceeds 7.0 Ω for more than 1 microsecond Dry Circuit Resistance Signal Contact≤25mΩ Power Contact≤15mΩ; Voltage Drop≤50mV	USCAR-2 Rev.8 5.6.1
5-4-2	温度/湿度循环 Temperature/Humidity Cycling	温度变化幅度：-40℃ to 125℃ 时间：温室内 5 小时内不能进行泄漏 湿度：(80-100)% 干电路电阻 信号 Pin≤25mΩ 电源 Pin≤15mΩ; 电压降≤50mV 绝缘电阻>100 MΩ Time: No leakage within 5 hours of greenhouse Temperature range :-40℃ to 125℃ Humidity :(80-100)% Dry Circuit Resistance Signal Contact≤25mΩ Power Contact≤15mΩ; Voltage Drop≤50mV Insulation resistance>100 MΩ	USCAR-2 Rev.8 5.6.2
5-4-3	高温暴露 High Temperature Exposure	时间：1008H，温度：125℃ 干电路电阻 信号 Pin≤25mΩ 电源 Pin≤15mΩ; 电压降≤50mV Time: 1008H， Temperature :125℃ Dry Circuit Resistance Signal Contact≤25mΩ Power Contact≤15mΩ; Voltage Drop≤50mV	USCAR-2 Rev.8 5.6.3



Product Specification 【产品规格书】	Document No.	PS-2043-03
Product Name 【产品名称】： 2.00mm Pitch 2043 Series Connector	Date Issued	2024/09/09
	Date Revised	/
	Version	A0

5-4-4	焊锡耐热性 Resistance to Soldering Heat	焊接时间: 5~10 秒. 焊接温度: 255+5/-5℃. Soldering time:5~10 sec solder. Temperature:255+5/-5℃.	EIA-364-56
-------	---------------------------------------	--	------------



Product Specification 【产品规格书】	Document No.	PS-2043-03
Product Name 【产品名称】： 2.00mm Pitch 2043 Series Connector	Date Issued	2024/09/09
	Date Revised	/
	Version	A0

【6.测试组 Test Group】

流程图		端子机械测试	电气性能	连接器机械测试				
参考标准	测试序列	端子至端子的啮合/分离力	最大电流/电流循环	端子至连接器的插入/保持力	混合部件的啮合/分离力	连接器至连接器的配合/分离力	极性特征	板端 Pin 针保持力
USCAR-2	序列 ID	A	B	C	D	E	F	G
	测试样品	10	10	10	10	15	10	10
5.1.7	连接器/端子循环		2					
5.1.8	外观检查	1、3	1、5	1、3	1、3	1、3	1、3	1、3
5.2.1	端子至端子的啮合/分离力	2						
5.3.3	最大试验电流能力		3					
5.3.4	电流循环		4					
5.4.1	端子至连接器的插入/保持力			2				
5.4.2	连接器至连接器的配合/分离力（无机械辅助）					2		
5.4.4	极化特征效果						2	
5.4.5	混合部件的啮合/分离力				2			
5.7.1	板端 Pin 针保持力							2

说明:
准备的样品应与适用于生产的说明一致，应随机从当前生产中选取

Product Specification 【产品规格书】	Document No.	PS-2043-03
Product Name 【产品名称】： 2.00mm Pitch 2043 Series Connector	Date Issued	2024/09/09
	Date Revised	/
	Version	A0

流程图		连接器系统电性能测试顺序				
参考标准	测试序列	振动冲击	热冲击	温度/湿度循环	高温暴露	焊锡耐热性
USCAR-2 或 EIA-364	序列 ID	H	I	J	K	L
	测试样品	10	10	10	10	5
5.1.8	外观检查	1、7	1、7	1、8	1、7	1、3
5.1.7	连接器/端子循环	2	2	2	2	
5.1.9	电路连贯性监控	4	4			
5.3.1	干式电路电阻	3、5	3、5	3、5	3、5	
5.3.2	电压降	6	6	6	6	
5.4.1	端子至连接器的插入/保持力			9	8	
5.4.6	振动/机械冲击	4				
5.5.1	绝缘电阻			7		
5.6.1	热冲击		4			
5.6.2	温度/湿度循环			4		
5.6.3	高温暴露				4	
EIA-364-56	焊锡耐热性					2

注释：

(1) 环境温度等级 T3: -40℃ to 125℃。

(2) 振动等级 V1

(3) 本产品适用于线缆选用 AWG 16~24 (1.5~0.13mm²) 。